



RACKING-UK

info@racking-uk.com

www.racking-uk.com

Storage & Workplace Equipment

01621 786630

**ASK US
TO QUOTE**

Safety Steps & Work Platforms



**THERE IS NO
SPACE TOO BIG
TOO SMALL
OR TOO
AWKWARD!**

info@racking-uk.com www.racking-uk.com


2 Safety Steps

Safety Steps - Light

The two tread Light Step has a steadying post, whilst the three and four tread models have full handrails. The steps are easy to move around on the four spring loaded castors which retract into

steel cups when the unit is stepped on. The steel cups protect office furniture and shelving from damage, when moving the steps around.

	CODE	NUMBER OF TREADS	TREAD TYPE	TOP TREAD HEIGHT	WORKING HEIGHT	TREAD WIDTH	OVERALL HEIGHT	OVERALL LENGTH	OVERALL WIDTH
A	M02EA380P	2	Aluminium	460mm	2000mm	380mm	1500mm + post	430mm	510mm
	M02FR380P	2	Rubber	460mm	2000mm	380mm	1500mm + post	430mm	510mm
B	M03EA380	3	Aluminium	750mm	2250mm	380mm	1550mm	930mm	510mm
	M03FR380	3	Rubber	750mm	2250mm	380mm	1550mm	930mm	510mm
C	M04EA380	4	Aluminium	1000mm	2500mm	380mm	1800mm	1140mm	510mm
	M04FR380	4	Rubber	1000mm	2500mm	380mm	1800mm	1140mm	510mm

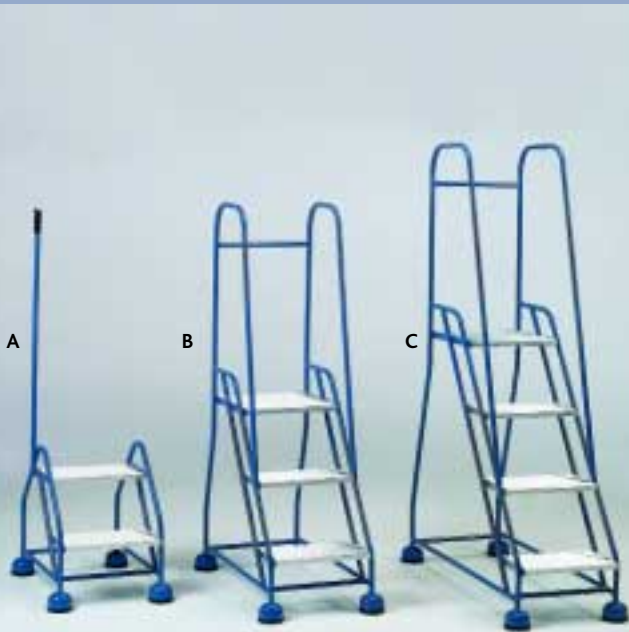

Safety Steps - Light Industrial

The Light Industrial Steps have a heavy duty 50mm rubber spring loaded castor, which enables the steps to be used in warehouses, and factories where greater distances are travelled over rougher

floor conditions. The framework is designed to provide stability when in use and the full handrail gives a feeling of security, when climbing or standing on the step.

	CODE	NUMBER OF TREADS	TREAD TYPE	TOP TREAD HEIGHT	WORKING HEIGHT	TREAD WIDTH	OVERALL HEIGHT	OVERALL LENGTH	OVERALL WIDTH
D	FR02EA380P	2	Aluminium	480mm	2000mm	380mm	1500mm + post	680mm	450mm
	FR02FR380P	2	Rubber	480mm	2000mm	380mm	1500mm + post	680mm	450mm
E	FR02EA406	2	Aluminium	480mm	2000mm	380mm	520mm	500mm	440mm
	FR02FR406	2	Rubber	480mm	2000mm	380mm	520mm	500mm	440mm
F	FR03EA406	3	Aluminium	730mm	2250mm	380mm	760mm	690mm	440mm
	FR03FR406	3	Rubber	730mm	2250mm	380mm	760mm	690mm	440mm
G	FR03EA380	3	Aluminium	750mm	2250mm	380mm	1550mm	920mm	440mm
	FR03FR380	3	Rubber	750mm	2250mm	380mm	1550mm	920mm	440mm
H	FR04EA380	4	Aluminium	1003mm	2528mm	380mm	1790mm	1120mm	440mm
	FR04FR380	4	Rubber	1003mm	2528mm	380mm	1790mm	1120mm	440mm

Number of treads includes top platform. Tread depths 200mm

THERE IS NO SPACE TOO BIG
TOO SMALL
OR TOO AWKWARD!

Safety Steps - Low Steps

The Safety Step Low range is highly manoeuvrable on four spring loaded 75mm rubber tyre castors, which retract when the

unit is stepped on. The steps and platform have full height handrails all round.

CODE	NUMBER OF TREADS	TREAD TYPE	TOP TREAD HEIGHT	WORKING HEIGHT	TREAD WIDTH	OVERALL HEIGHT	OVERALL LENGTH	OVERALL WIDTH
H02EA508	2	Aluminium	480mm	2000mm	510mm	1300mm	650mm	580mm
H02FR508	2	Rubber	480mm	2000mm	510mm	1300mm	650mm	580mm
H02PM508	2	Metal	480mm	2000mm	510mm	1300mm	650mm	580mm
H03EA508	3	Aluminium	720mm	2225mm	510mm	1520mm	850mm	580mm
A H03FR508	3	Rubber	720mm	2225mm	510mm	1520mm	850mm	580mm
H03PM508	3	Metal	720mm	2225mm	510mm	1520mm	850mm	580mm
H04EA508	4	Aluminium	960mm	2460mm	510mm	1810mm	900mm	580mm
H04FR508	4	Rubber	960mm	2460mm	510mm	1810mm	900mm	580mm
H04PM508	4	Metal	960mm	2460mm	510mm	1810mm	900mm	580mm

Number of treads includes top platform. Tread depths 200mm

Safety Step – Medium

The Medium Step moves easily on the 200mm rubber wheels at the high end, a 100mm castor is mounted in a footlock brake at

the low end. The framework is fully welded, with a 200mm top platform depth

CODE	NUMBER OF TREADS	TREAD TYPE	TOP TREAD HEIGHT	WORKING HEIGHT	TREAD WIDTH	OVERALL HEIGHT	OVERALL LENGTH	OVERALL WIDTH
H05EA508	5	Aluminium	1200mm	2700mm	510mm	2030mm	1210mm	700mm
H05FR508	5	Rubber	1200mm	2700mm	510mm	2030mm	1210mm	700mm
H05PM508	5	Metal	1200mm	2700mm	510mm	2030mm	1210mm	700mm
B H06EA508	6	Aluminium	1440mm	2940mm	510mm	2280mm	1410mm	700mm
H06FR508	6	Rubber	1440mm	2940mm	510mm	2280mm	1410mm	700mm
H06PM508	6	Metal	1440mm	2940mm	510mm	2280mm	1410mm	700mm

Number of treads includes top platform. Tread depths 200mm




**ASK US
TO QUOTE**

Safety Step - High

This range of High Steps are our most popular with the top tread heights covering most applications. The steps have a robust fully welded mild steel square tube framework, with tubular handles all round and to increase the stability that the 762mm wide treads give to the steps, we slope out the side and end frames from the platform. If the steps are being used in a narrow aisle, we can manufacture steps that meet that requirement. The steps fold to

allow entry in to areas with restricted access and for ease of transport, full instructions are attached to the framework. The steps move easily on 200mm nylon centre, rubber tyre wheels at the high end and 100mm swivel castors mounted in a footlock at the low end. As an optional extra, a Side Lever Lock can be fitted in place of the footlock, with no extra charge.

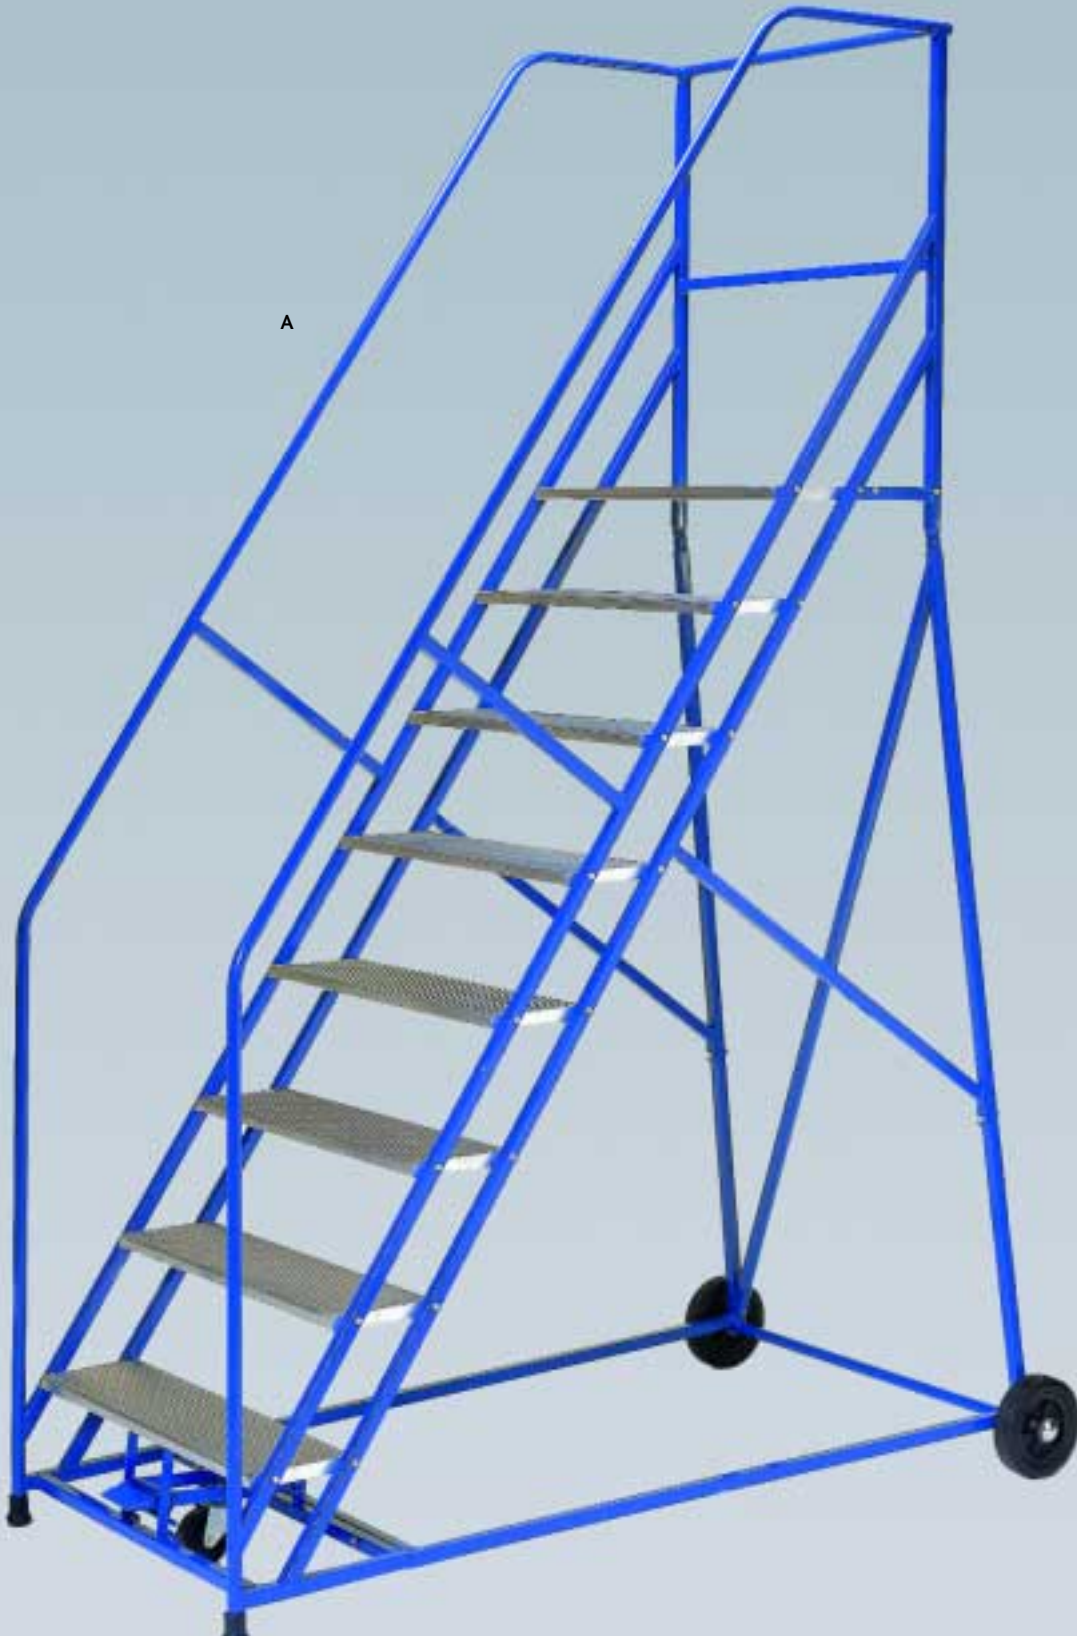

THERE IS NO
SPACE TOO BIG
TOO SMALL
OR TOO
AWKWARD!

	CODE	NUMBER OF TREADS	TREAD TYPE	TOP TREAD HEIGHT	WORKING HEIGHT	TREAD WIDTH	OVERALL HEIGHT	OVERALL LENGTH	OVERALL WIDTH
A	H07EA762	7	Aluminium	1680mm	3200mm	760mm	2600mm	1580mm	950mm
	H07FR762	7	Rubber	1680mm	3200mm	760mm	2600mm	1580mm	950mm
	H07PM762	7	Metal	1680mm	3200mm	760mm	2600mm	1580mm	950mm
	H08EA762	8	Aluminium	1920mm	3420mm	760mm	2850mm	1860mm	1040mm
	H08FR762	8	Rubber	1920mm	3420mm	760mm	2850mm	1860mm	1040mm
	H08PM762	8	Metal	1920mm	3420mm	760mm	2850mm	1860mm	1040mm
	H09EA762	9	Aluminium	2160mm	3660mm	760mm	3060mm	2080mm	1050mm
	H09FR762	9	Rubber	2160mm	3660mm	760mm	3060mm	2080mm	1050mm
	H09PM762	9	Metal	2160mm	3660mm	760mm	3060mm	2080mm	1050mm
	H10EA762	10	Aluminium	2400mm	3900mm	760mm	3300mm	2250mm	1060mm
	H10FR762	10	Rubber	2400mm	3900mm	760mm	3300mm	2250mm	1060mm
	H10PM762	10	Metal	2400mm	3900mm	760mm	3300mm	2250mm	1060mm
	H11EA762	11	Aluminium	2640mm	4140mm	760mm	3540mm	2450mm	1070mm
	H11FR762	11	Rubber	2640mm	4140mm	760mm	3540mm	2450mm	1070mm
	H11PM762	11	Metal	2640mm	4140mm	760mm	3540mm	2450mm	1070mm
	H12EA762	12	Aluminium	2880mm	4380mm	760mm	3780mm	2650mm	1080mm
	H12FR762	12	Rubber	2880mm	4380mm	760mm	3780mm	2650mm	1080mm
	H12PM762	12	Metal	2880mm	4380mm	760mm	3780mm	2650mm	1080mm
	H13EA762	13	Aluminium	3120mm	4620mm	760mm	4090mm	2820mm	1090mm
	H13FR762	13	Rubber	3120mm	4620mm	760mm	4090mm	2820mm	1090mm
	H13PM762	13	Metal	3120mm	4620mm	760mm	4090mm	2820mm	1090mm
H14EA762	14	Aluminium	3360mm	4860mm	760mm	4260mm	2850mm	1090mm	
H14FR762	14	Rubber	3360mm	4860mm	760mm	4260mm	2850mm	1090mm	
H14PM762	14	Metal	3360mm	4860mm	760mm	4260mm	2850mm	1090mm	
H15EA762	15	Aluminium	3600mm	5100mm	760mm	4500mm	3260mm	1100mm	
H15FR762	15	Rubber	3600mm	5100mm	760mm	4500mm	3260mm	1100mm	
H15PM762	15	Metal	3600mm	5100mm	760mm	4500mm	3260mm	1100mm	

Number of treads includes top platform. Tread depths 200mm


Options - Safety Step. We have developed a range of standard options that have been requested regularly over the years, this will enable you to customise your steps without increasing the price too much.

CODE	SAFETY STEP OPTIONS
HPE	Extend the length of the Top Tread in 200mm sections, over 1000mm we will quote a special price.
SPH	A platform height that is different to the standard, this requires us to re- position every tread, which is done by hand.
HRORS	Hand rail on right side only ascending.
HROLS	Handrail on left side only ascending.
HG	Side hinged tubular gate fitted to the handrail at the foot of the steps to prevent unauthorised access.
HGP	Side hinged tubular gate fitted at the top of the steps, to increase safety on top tread.
HWSH	300mm x 500mm wide work shelf fitted to the handrail at the end of the platform. Price includes extra 200mm length to platform.
HKP	All the safety steps have a knee rail, but a 100mm high mild steel kick plate is available all round the platform.
FTLOK	200mm nylon centre wheels & 100mm nylon swivel castors in a footlock in place of the four sprung loaded castors. on the H03 & H04 models. This option offers a very stable step for working at low heights.
HL	Side lever lock in place of the footlock, H05 to H15 models only.
HPG	Side hinged tubular gate, mounted on either side or the end of the top tread. The top tread depth is increased to 600mm to allow safe opening and access. Available on H07 to H21 models only.

Tread Types

There are three types of tread available.

CODE	SAFETY STEP OPTIONS
EA	Aluminium
FR	Fluted Rubber
PM	Punched Metal

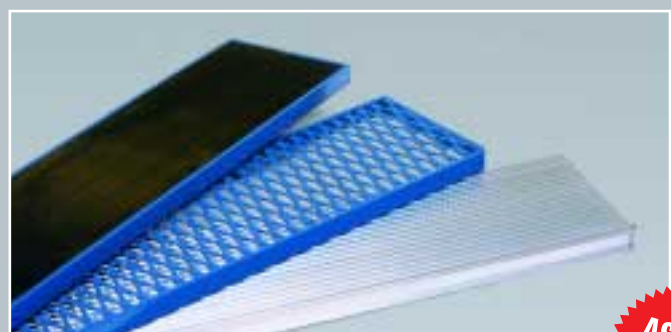

**ASK US
TO QUOTE**

6 Safety Steps

Safety Step - Light Duty

Safety steps with two 200mm rubber tyre wheels and two 75mm nylon spring loaded castors.

	CODE	NUMBER OF TREADS	TREAD TYPE	TOP TREAD HEIGHT	WORKING HEIGHT	OVERALL HEIGHT	OVERALL LENGTH	OVERALL WIDTH
A	MSS016S	2	Punched Steel	508mm	2008mm	1422mm	710mm	740mm
	MSS017R	2	Rubber	508mm	2008mm	1422mm	710mm	740mm
	MSS018S	3	Punched Steel	762mm	2262mm	1676mm	870mm	740mm
	MSS019R	3	Rubber	762mm	2262mm	1676mm	870mm	740mm
	MSS020S	4	Punched Steel	1015mm	2515mm	1930mm	1040mm	740mm
	MSS021R	4	Rubber	1015mm	2515mm	1930mm	1040mm	740mm
	MSS032S	5	Punched Steel	1270mm	2770mm	2185mm	1210mm	740mm
	MSS033R	5	Rubber	1270mm	2770mm	2185mm	1210mm	740mm
	MSS034S	6	Punched Steel	1524mm	3024mm	2438mm	1380mm	740mm
	MSS035R	6	Rubber	1524mm	3024mm	2438mm	1380mm	740mm

Safety steps with two 200mm rubber tyre wheels and two 100mm castors in a side lever lock.

	CODE	NUMBER OF TREADS	TREAD TYPE	TOP TREAD HEIGHT	WORKING HEIGHT	OVERALL HEIGHT	OVERALL LENGTH	OVERALL WIDTH
B	MSS036S	7	Punched Steel	1778mm	3278mm	2693mm	1560mm	864mm
	MSS037R	7	Rubber	1778mm	3278mm	2693mm	1560mm	864mm
	MSS057S	8	Punched Steel	2030mm	3530mm	2945mm	1740mm	889mm
	MSS058R	8	Rubber	2030mm	3530mm	2945mm	1740mm	889mm
	MSS059S	9	Punched Steel	2286mm	3786mm	3201mm	1920mm	915mm
	MSS060R	9	Rubber	2286mm	3786mm	3201mm	1920mm	915mm
	MSS001S	10	Punched Steel	2540mm	4040mm	3419mm	2090mm	990mm
	MSS002R	10	Rubber	2540mm	4040mm	3419mm	2090mm	990mm
	MSS003S	11	Punched Steel	2794mm	4294mm	3709mm	2260mm	1067mm
	MSS004R	11	Rubber	2794mm	4294mm	3709mm	2260mm	1067mm
	MSS005S	12	Punched Steel	3048mm	4548mm	3963mm	2430mm	1143mm
	MSS006R	12	Rubber	3048mm	4548mm	3963mm	2430mm	1143mm
	MSS007S	13	Punched Steel	3302mm	4802mm	4217mm	2610mm	1143mm
	MSS008R	13	Rubber	3302mm	4802mm	4217mm	2610mm	1143mm
	MSS010S	14	Punched Steel	3555mm	5055mm	4470mm	2790mm	1220mm
	MSS011R	14	Rubber	3555mm	5055mm	4470mm	2790mm	1220mm
	MSS012S	15	Punched Steel	3810mm	5310mm	4729mm	2970mm	1220mm
	MSS013R	15	Rubber	3810mm	5310mm	4729mm	2970mm	1220mm
	MSS014S	16	Punched Steel	4060mm	5560mm	4974mm	3140mm	1220mm
	MSS015R	16	Rubber	4060mm	5560mm	4974mm	3140mm	1220mm

A



B



C



Work Platforms

C - Work Platforms made to order contact office for details.

THERE IS NO SPACE TOO BIG TOO SMALL OR TOO AWKWARD!