



Call us now
to find out
about how
you can
protect
your racking
investment


01621 786630

Suite 340
Dorset House
25 Duke St. Chelmsford CM1 1TB
E-mail: info@racking-uk.com
www.racking-uk.com



Quick and easy to install upright racking protection system

Designed to absorb impact that would normally result in damage. Constructed for durability to high material specifications. Needs no drilling or bolting. Effectively eliminates damage, can protect any height or upright.

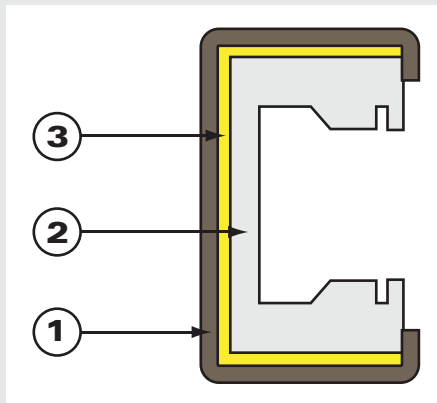

SPECIFICATIONS

- 1 TOUGH RIGID OUTER** - Deflects blows and spreads the impact.

The tough rigid outer is manufactured to the highest specifications. This tough outer skin takes the initial blow. It bends and deflects with the impact and distributes the blow over a wider area. This significantly removes the possibility of racking upright damage.

- 2 LOW DENSITY BUFFER** - Absorbs minor impacts realigning the guard.

The inner low density buffer is soft and flexible, It is formed exactly to the shape of the upright. The buffer reacts quickly and effectively under even the smallest impact. Simply, the guard

shifts its position when nudged by a miss aimed pallet or truck. When the pressure is released the buffer expands, realigning the guard.

- 3 HIGH DENSITY BUFFER** - Absorbs major impacts and defuses the blow.

The middle high density buffer is designed to absorb the energy and distribute it evenly through the guard. Being of high density, compression occurs at a much slower rate. The impact is diffused and spread throughout the guard.

- **TOUGH RIGID OUTER:**
High density polyethylene.
Can operate between -40°C - 80°C.
Resistant to chemical and environmental damage.
- **TWO PART (HIGH & LOW DENSITY) INNER:**
Closed Cell Expanded Polyethylene.
Resistant to liquid absorption.
Fire Resistant to BS.4735, ISO.3582 & FMV.SS302.
Can operate between -40°C - 80°C,
Suitable for cold store use.



RACKING-UK

Storage & Workplace Equipment